



PK Spring-Applied Motor Brake

Electrically Released Brake
for Wind Turbines

Wind Turbine Applications

- Small (less than 50 kw) wind turbine
 - Yaw motor brake
 - Main rotor brake on generator
- Medium and large wind turbine
 - Yaw motor brake
 - Failsafe brake for service lift and personal hoist
 - Pitch motor brake

Warner Electric is a world leader in the design and manufacture of hydraulic, pneumatic and electromagnetic brakes and clutches.

We offer a full range of brakes and specialize in customized solutions to meet your specific performance and installation requirements.

We have over 60 years of experience delivering high technology, cost effective braking systems. We offer production, engineering and application support from our facilities in Europe, the U.S. and China.

Contact us today to discuss how our dedicated engineers can assist you.

For technical assistance call
Europe: +44 1356 60 2000
US: +1 800-825-9050

Parking and stopping standard brake for wind turbines

The PK (Very Thin) range is a pre-assembled on/off dry failsafe electromagnetic brake. This failsafe brake is used for parking and emergency only. The brake uses a high coefficient of friction material and powerful coil to optimize torque in a low profile package. The coil can be linked with a pulse width modulation power supply to reduce power consumption and maintenance.


The benefits of this cost competitive range include; one piece design for easy assembly, lower power consumption, and overall lower maintenance costs.

- High torque within a compact space envelope
- Multi-step braking versions available
- Low profile space saving design
- Dust cover option
- High quality corrosion protection treatment



PK Spring-Applied Motor Brake

Electrically Released Brake

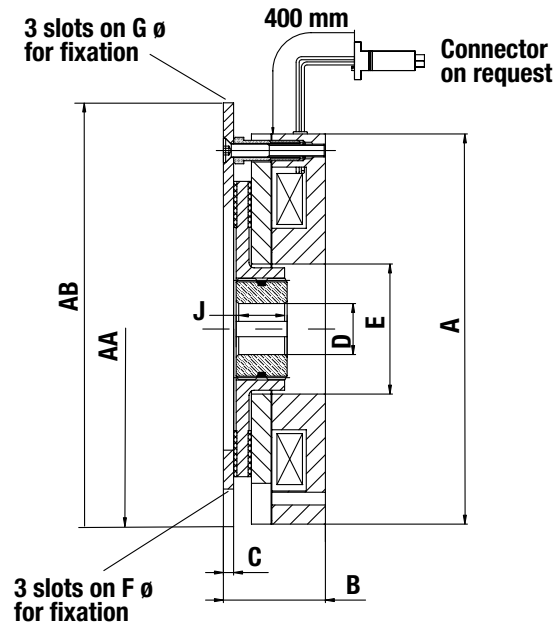

Size	10	20	35	60	100
Static Torque (Nm)	15	30	55	95	150
Static Torque (lb. ft)	11.1	22.2	40.7	70.3	111
A	96	133	153	164	184
B	39.7	43	43	59	75
C	3.2	4.5	6	6	10
D	15/20H7	15/20H7	19.05/20/25H7	20/25/30H7	25/30/35H7
J	20	20	25	30	30
E	28.5	43.5	51	59	70
F	90	112	132	145	170
G	112	132	145	170	196
AA small Flange	96	133	153	164	184
AB large Flange	115	138	178	185	215
Ambient Temperature	Minus 20 Plus 60 Degree C				
Voltage	Based on customer requirements				